

269A9210

KIT


REVISIONS

SYM

DESCRIPTION

DATE


APP'D

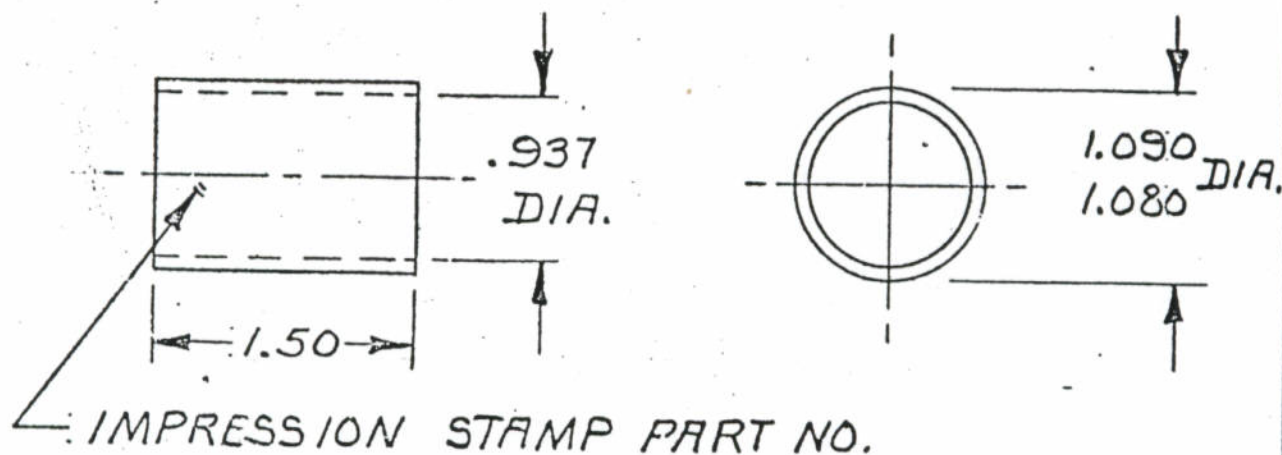

4. USE THIS SLEEVE WITH 269A9206 WRENCH
ON ADJUSTMENT OF 269A1250 DAMPER
3. PARKERIZE PER SPEC. MIL-P-16232, TYPE Z, CLASS 2
2. ALL MACHINED SURFACES ¹²⁵ FINISH.
1. ALT MTL. - 1.12 DIA AISI 1018 STEEL ROD - COMM.
- NOTES: UNLESS OTHERWISE SPECIFIED



1.12 O.D. x .094 WALL x 1.50 SHELBY ROUND SEAMLESS TUBE-COMM.

REQD	PART NO.	NAME	SIZE	DESCRIPTION	SPECIFICATION
UNLESS OTHERWISE SPECIFIED	DRWN	PAGLOW	2-11-63	SLEEVE-MAIN ROTOR BLADE DAMPER WRENCH ADAPTER	HUGHES TOOL COMPANY AIRCRAFT DIVISION CULVER CITY, CALIFORNIA 
DIMENSIONAL TOLERANCES	CHK'D	2-11-63			
3 PLACE DECIMAL ± .010	APP'D	2-12-63			
2 PLACE DECIMAL ± .03	APP'D				
ANGULAR ± 0°30'	APP'D				
DIMENSIONS TO BE MET BEFORE PLATING.	APP'D			SCALE FULL	269A9210
CORNER RADIUS .062 ON C	APP'D				
BORES AND SPOT FACES OF 1.250 DIA. OR LESS -	APP'D				
.093 RADIUS ON GREATER THAN 1.250 DIA.	APP'D				
	APP'D				

CODE 02731

SHEET 1 OF 1

FORM 9131 REV 2-61

SHOP COPY